


HOSE PUMP Model N5N ROLLER TECHNOLOGY




Specifications

Max. Flow Rate:	2,32 m ³ /h (10,2 gpm)
Flow per revolution:	322 ml
Max. discharge pressure:	7 bar
Std. connections:	flanged DN25 (1" ANSI)
Internal hose diam.:	mm.25
Max liquid temp.:	90°C (194°F)
Achievable suction:	up to 0,8 bar
Suitable for:	intermittent operation

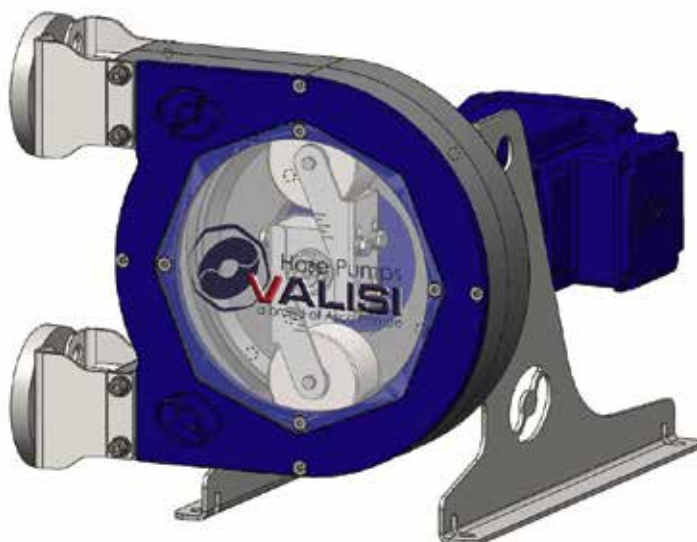


N5N Performance

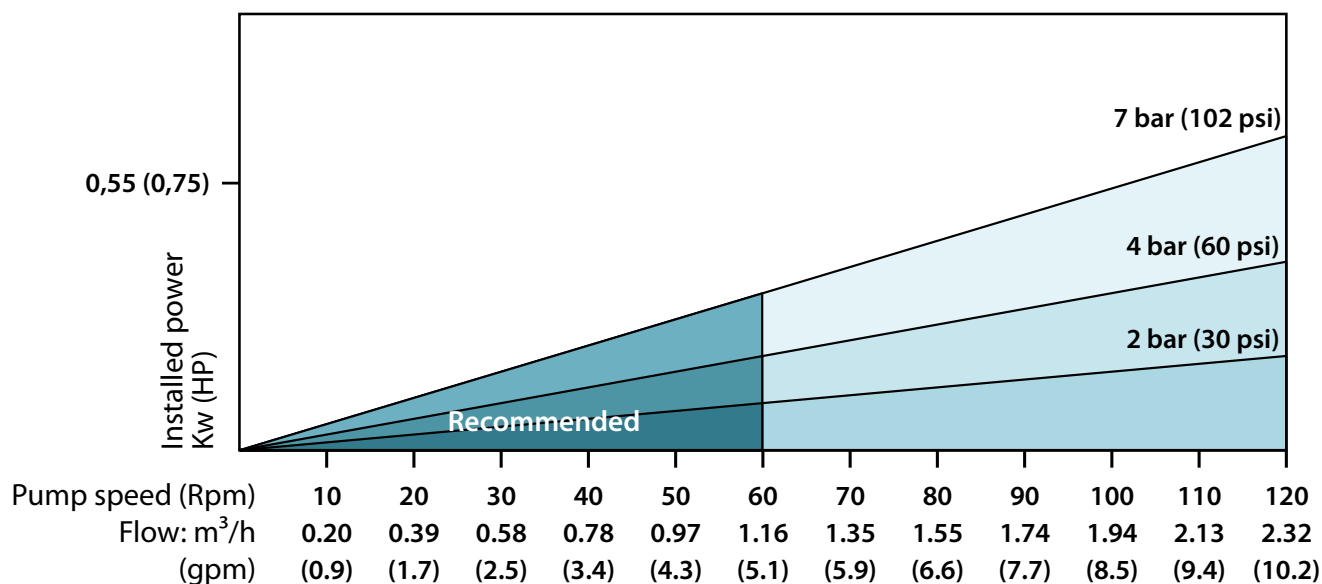

Valisi Hose pumps
a brand of Asco Pompe

Via Silvio Pellico, 6/8 - 20089 Rozzano (MI) - ITALY
Phone: +39 02 89257.1 - Fax: +39 02 89257.201
www.ascopompe.com - www.valisipumps.com
asco@ascopompe.com

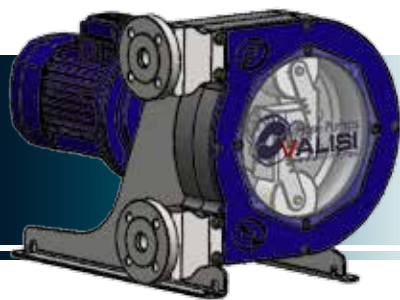

Hose construction

Not reinforced:



-  Tygon A60F (Varprene/Norprene A55F), FDA approved & NSF51 (cream white)
-  Neoprene (matt black)
-  Hypalon (glossy black)
-  Silicon (Red)

On Request

Tygon XL 60 (transparent), FDA approved

Fiber braided (reinforced):

-  NR (green stripe)
-  NRF-K long life (black hose with Valisi logo)
-  NBR (red stripe)
-  EPDM (white stripe)
-  NR Food grade (white & green stripe and white interior)
-  FKM - Viton® (purple stripe)
-  NBR Food Grade (black hose with white interior)
-  Hypalon (yellow stripe)

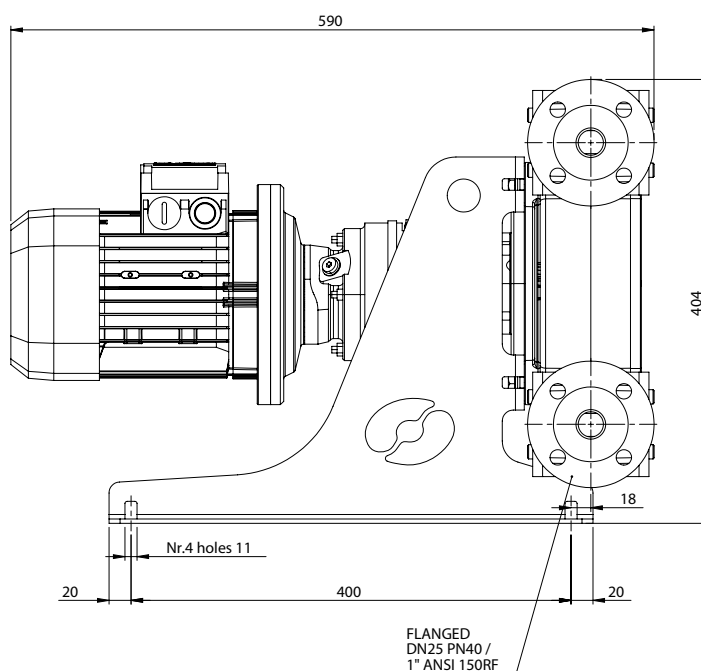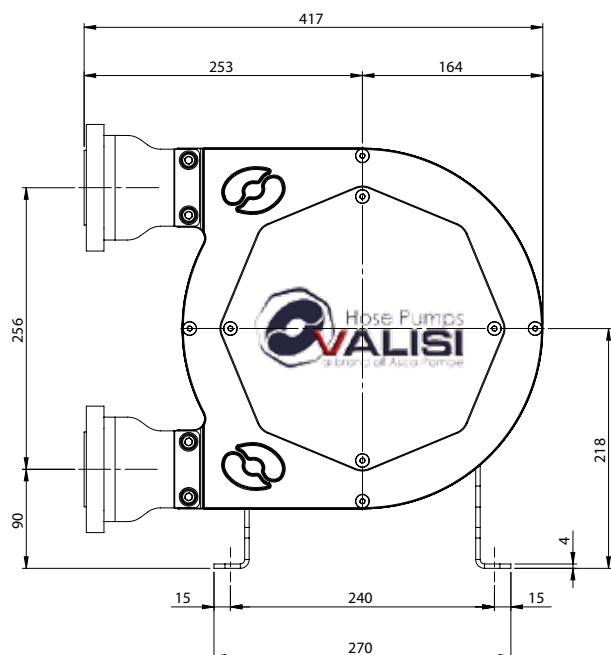

Weight

N5NF (fixed speed):	60 kg
N5NVM (mechanical variator):	65 Kg



Valisi Hose pumps a brand of Asco Pompe

Via Silvio Pellico, 6/8 - 20089 Rozzano (MI) - ITALY
 Phone: +39 02 89257.1 - Fax: +39 02 89257.201
www.ascopompe.com - www.valisipumps.com
asco@ascopompe.com